


HIGH PERFORMANCE BURNER




High performance burner - Stainless steel

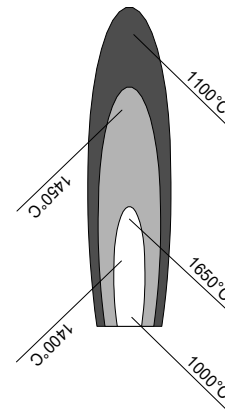

Order no.	Internal thread Inlet	Diameter mm	Working pressure bar	Consumption 1,5 bar - Capacity	
				kg/h	kw/h
1030 3735	M20x1 i.	34	0,5 - 4,0	1,6	20,59
1030 3740	M20x1 i.	40	0,5 - 4,0	2,0	25,74
1030 3745	M20x1 i.	45	0,5 - 4,0	2,4	30,89
1030 3750	M20x1 i.	50	0,5 - 4,0	3,6	46,33
1030 3760	M20x1 i.	60	0,5 - 4,0	8,0	102,96

Wind stabled burner - Stainless steel

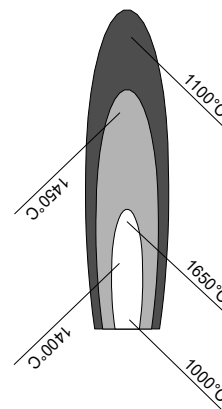

Order no.	Internal thread Inlet	Diameter mm	Working pressure bar	Consumption 1,5 bar - Capacity	
				kg/h	kw/h
1030 7745	M20x1 i.	45	0,5 - 4,0	2,4	30,89
1030 7750	M20x1 i.	50	0,5 - 4,0	3,6	46,33
1030 7760	M20x1 i.	60	0,5 - 4,0	8,0	102,96