


# HARD- AND SOFT SOLDERING BURNER POINT BURNER




## Hard- and soft soldering burner

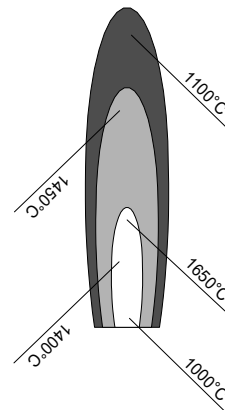

Order no.	Internal thread Inlet	Diameter mm	Working pressure bar	Consumption 1,5 bar - Capacity		Material
				kg/h	kw/h	
1030 3119	M20x1 i.	19	0,5 - 4,0	0,05	0,64	Brass
1030 3122	M20x1 i.	22	0,5 - 4,0	0,15	1,93	Brass
1030 3128	M20x1 i.	28	0,5 - 4,0	0,40	5,15	Brass
1030 3132	M20x1 i.	32	0,5 - 4,0	0,70	9,01	Brass

## Point burner

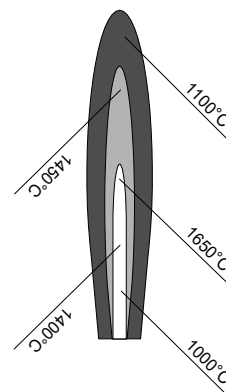

Order no.	Internal thread Inlet	Diameter mm	Working pressure bar	Consumption 1,5 bar - Capacity		Material
				kg/h	kw/h	
1030 3214	M20x1 i.	14	0,5 - 4,0	0,03	0,39	Brass
1030 3219	M20x1 i.	19	0,5 - 4,0	0,04	0,51	Brass
1030 3222	M20x1 i.	22	0,5 - 4,0	0,10	1,29	Brass